




CHARACTERISTIC CURVES


Models: NP1.5

Page Number	103-021
Effective	Oct 2001
Replaces	103/21 Aug 92
Section	103


640 RPM

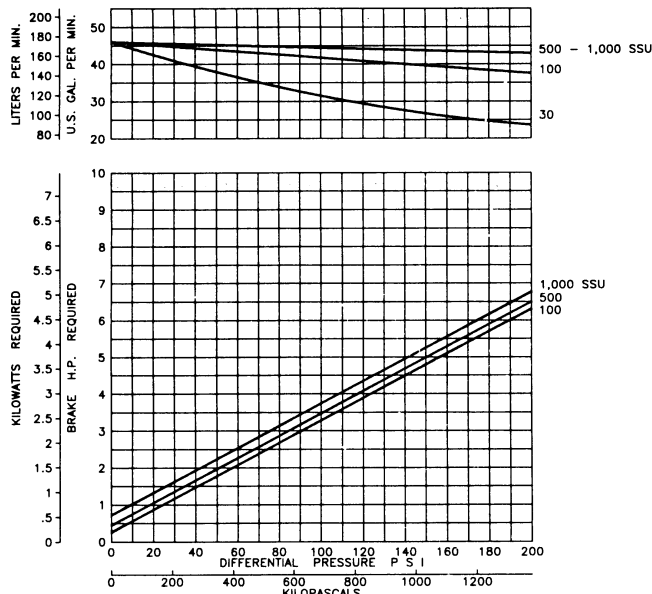


520 RPM

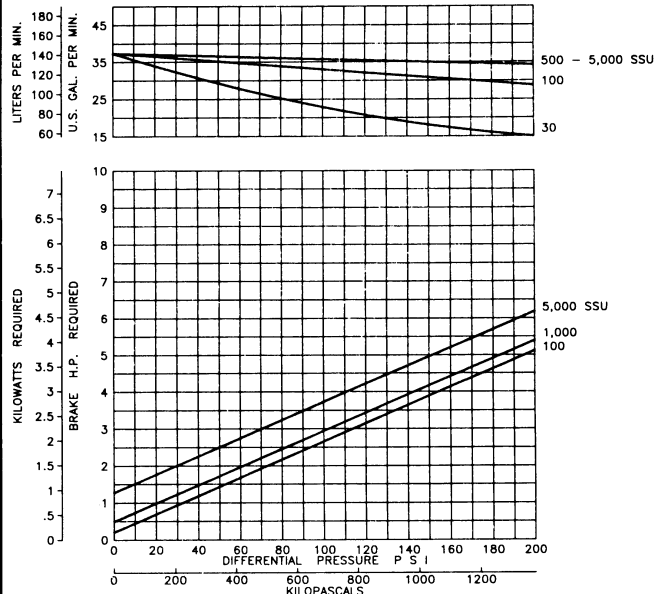

500 RPM

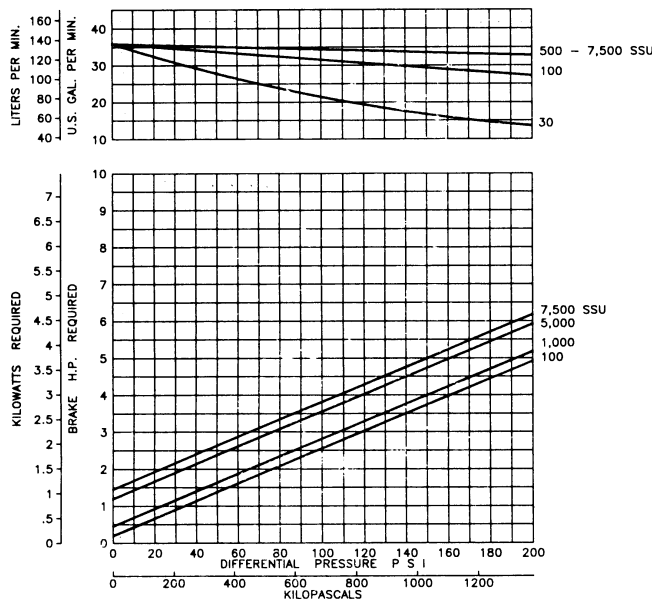

420 RPM

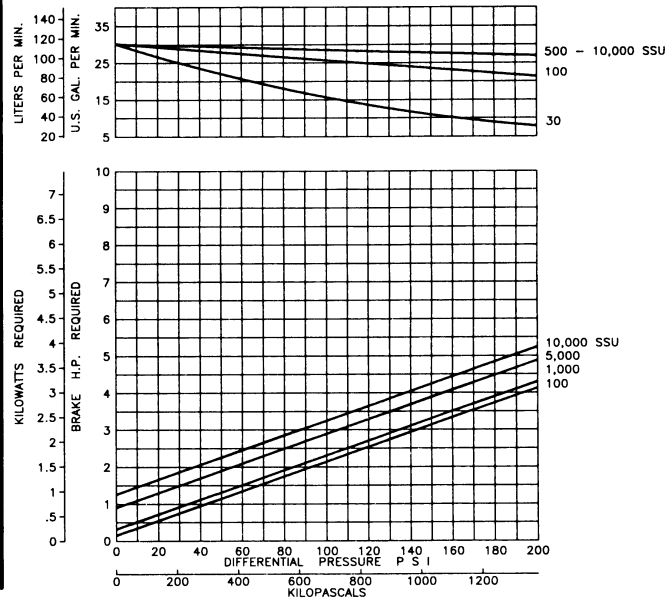


NOTE: Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.


CHARACTERISTIC CURVES

Models: NP1.5


400 RPM

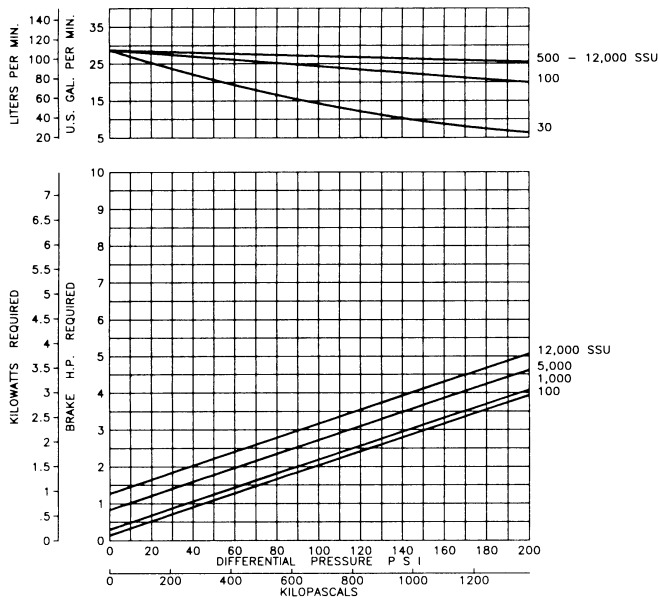


350 RPM

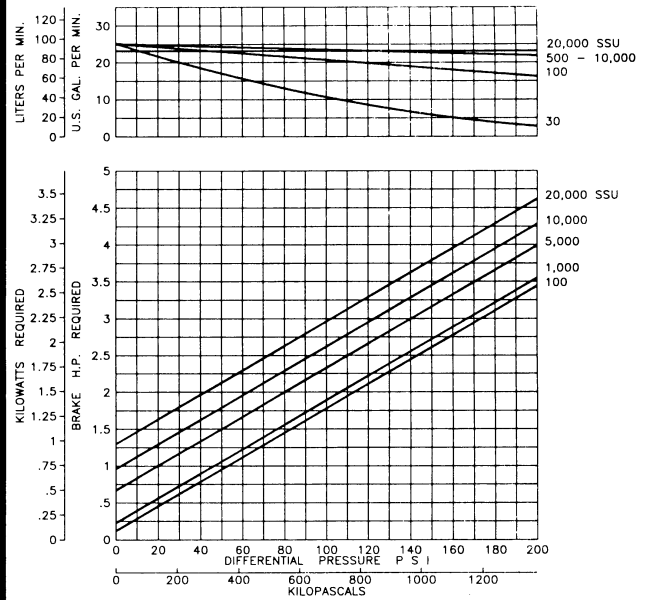

330 RPM

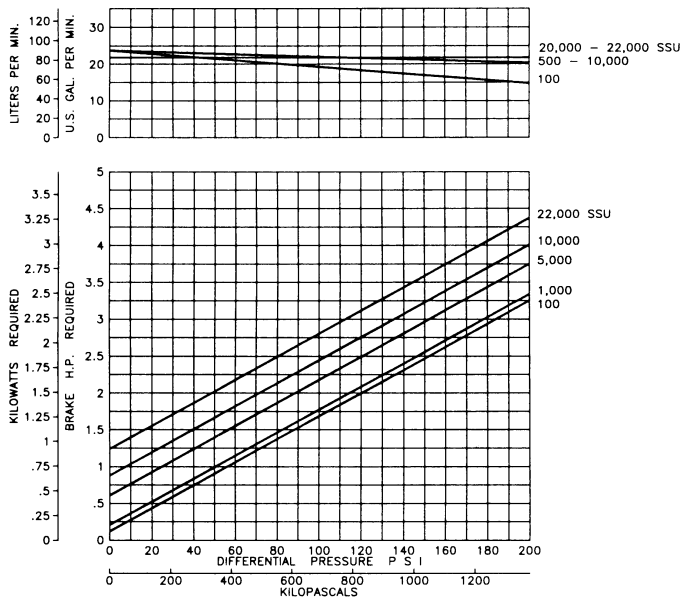

300 RPM

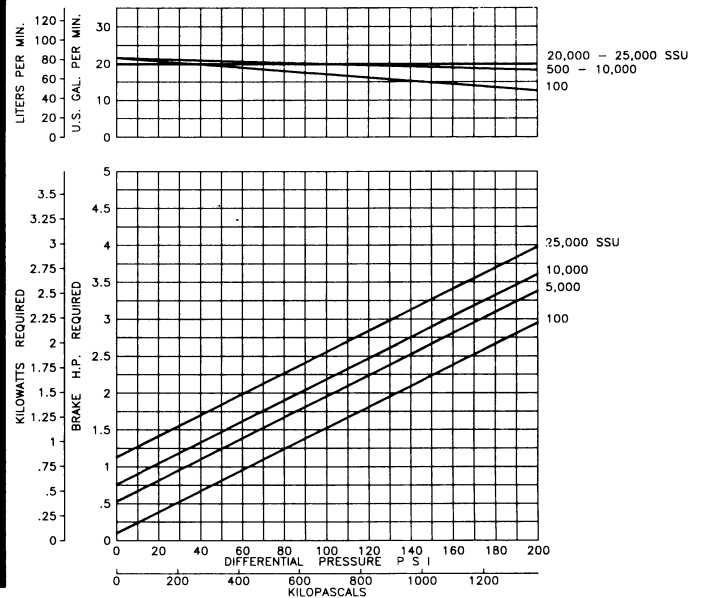


NOTE: Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.


CHARACTERISTIC CURVES

Models: NP1.5


280 RPM

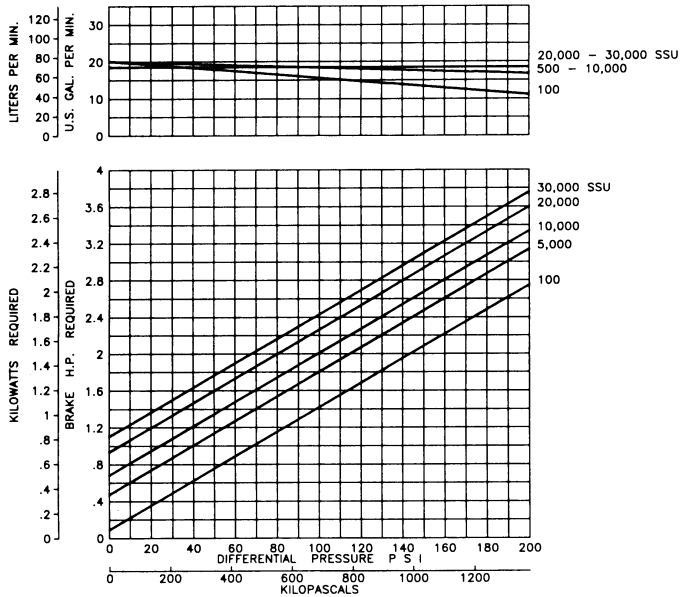


230 RPM

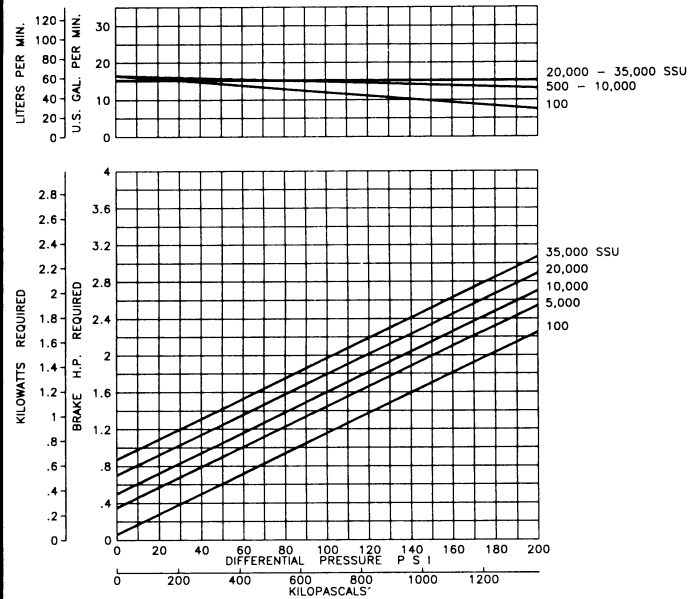

190 RPM

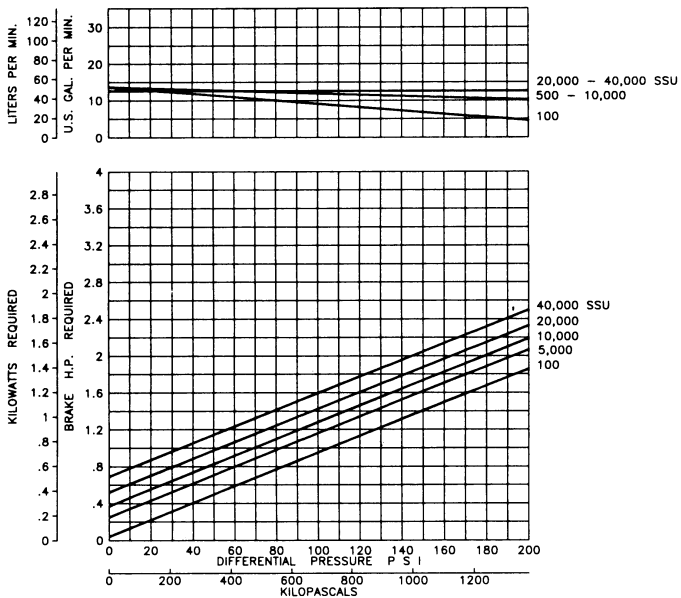

155 RPM

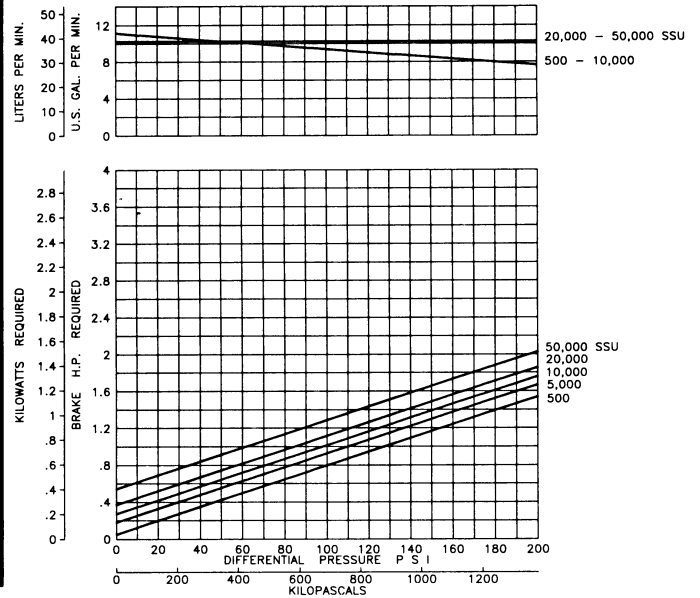


NOTE: Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.


CHARACTERISTIC CURVES

Models: NP1.5


125 RPM

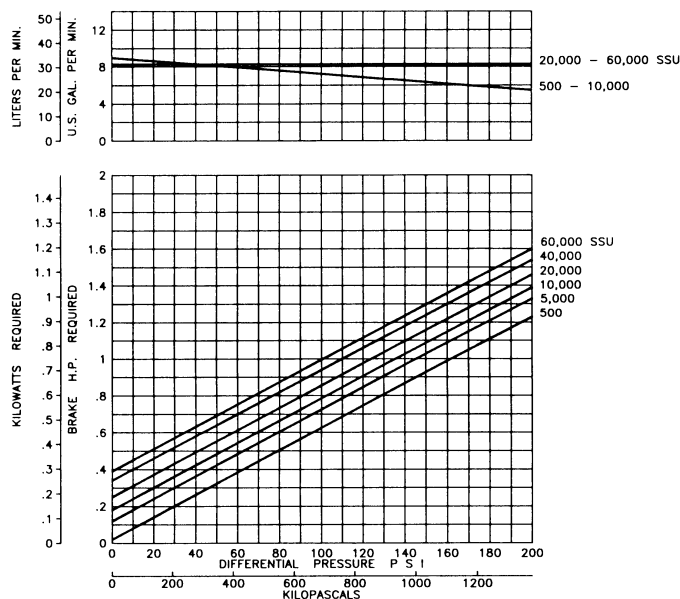


100 RPM

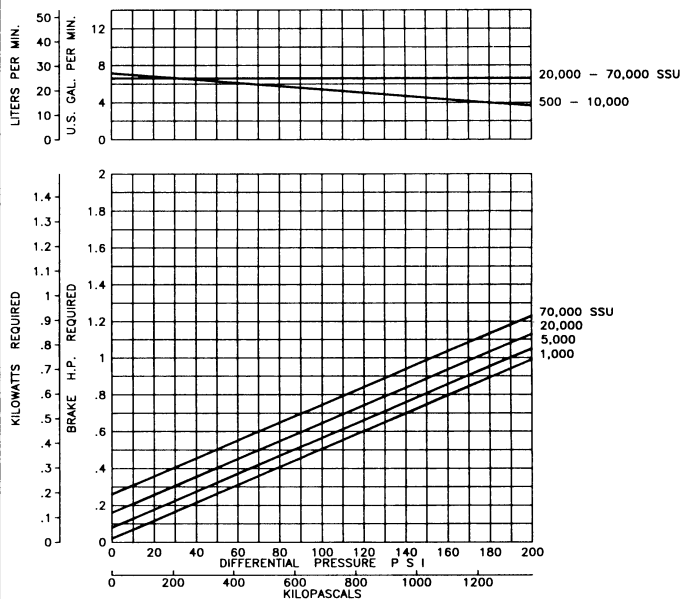

84 RPM

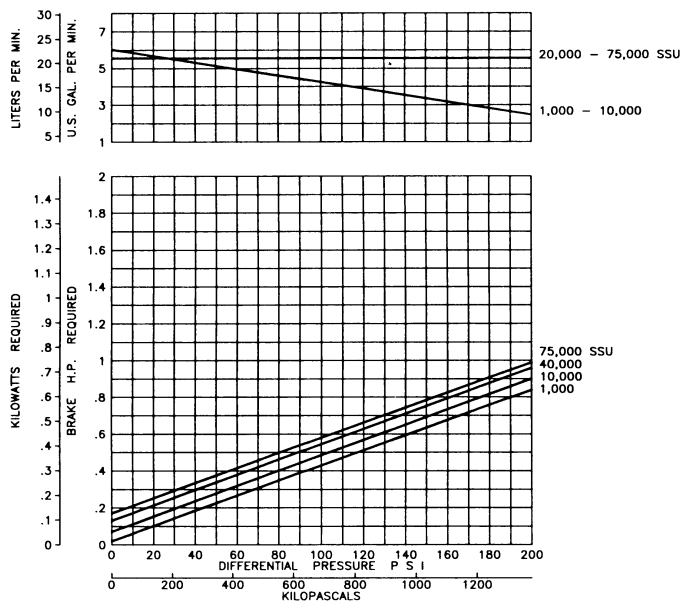

68 RPM

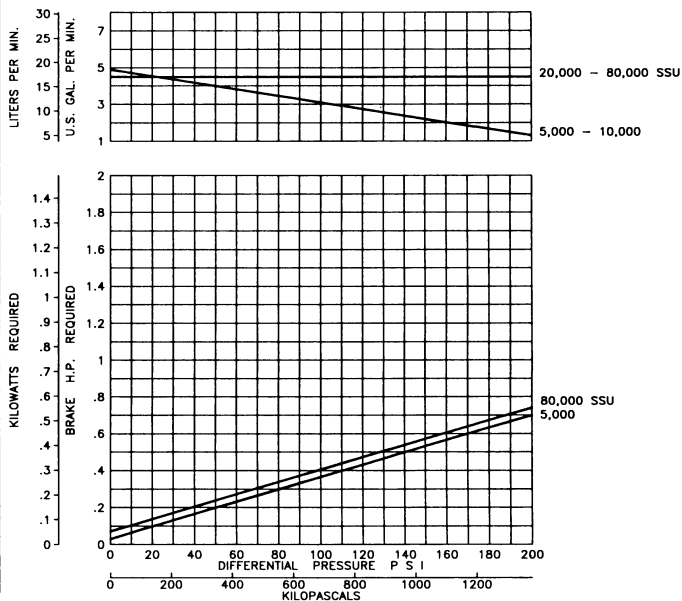

NOTE: Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

Distributed by:

"DAIS GLOBAL " LTD 3, Poruchik Nedelcho Bonchev Str., fl. 5 1528 Sofia, Bulgaria

tel: +359 2 973 27 67, e-mail: office@daisglobal.eu