

CHARACTERISTIC CURVES
Models: NP2


640 RPM

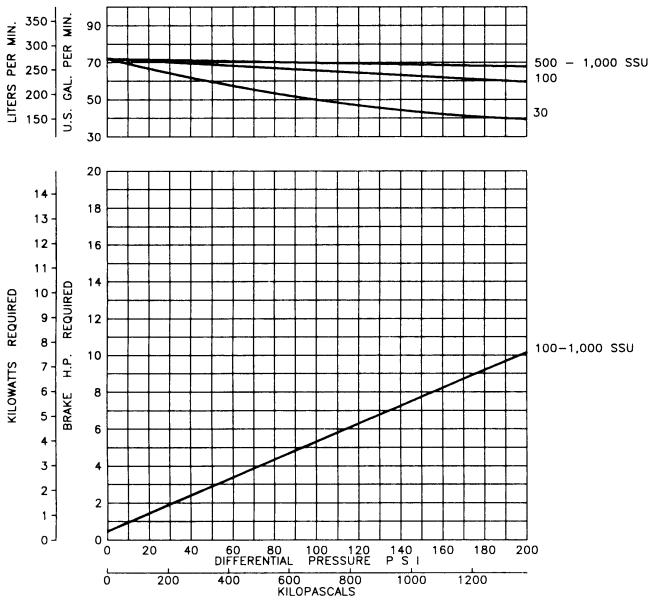


520 RPM

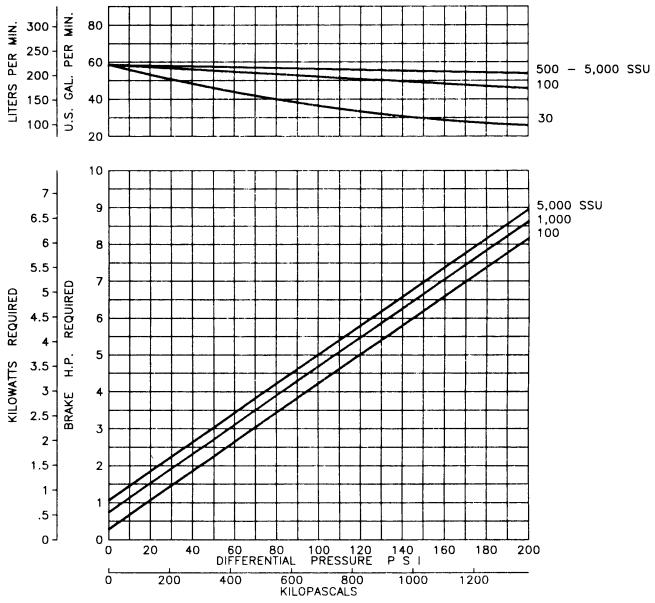

500 RPM

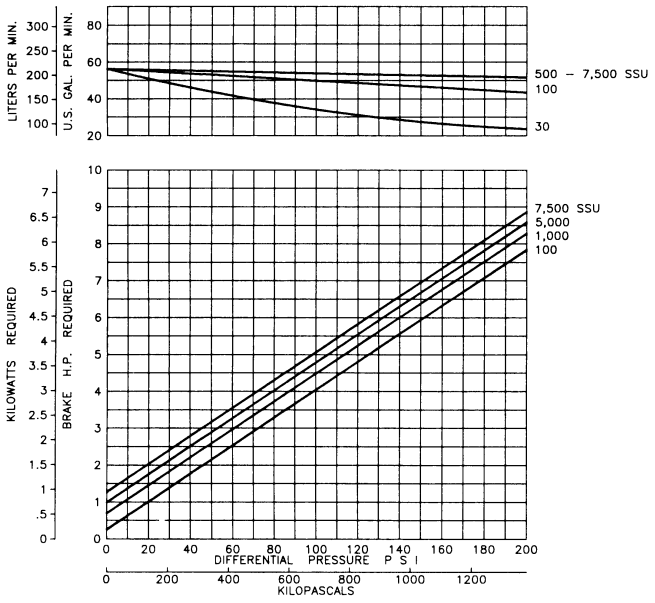

420 RPM

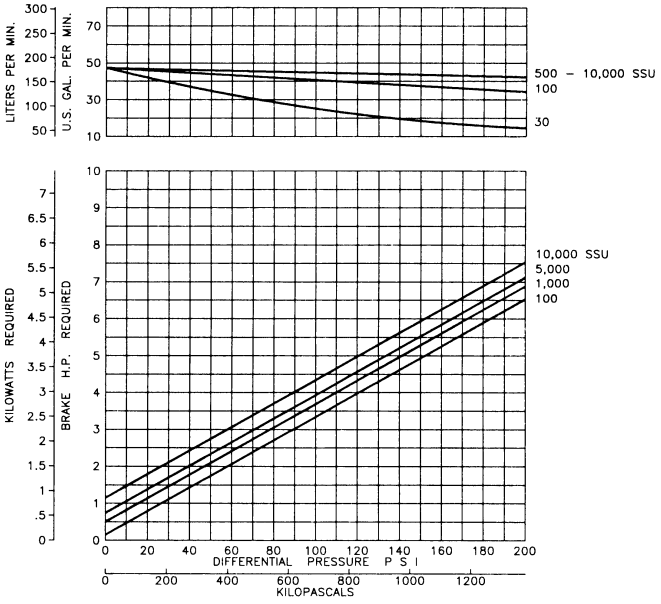


NOTE: Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.


CHARACTERISTIC CURVES

Models: NP2


400 RPM

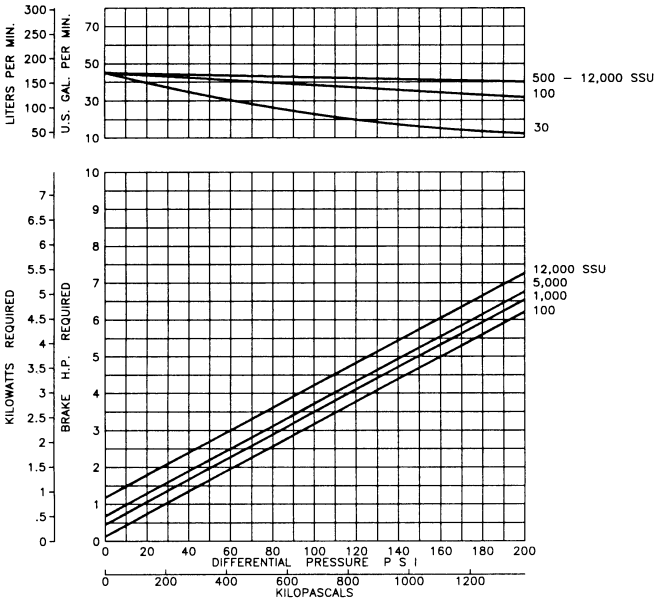


350 RPM

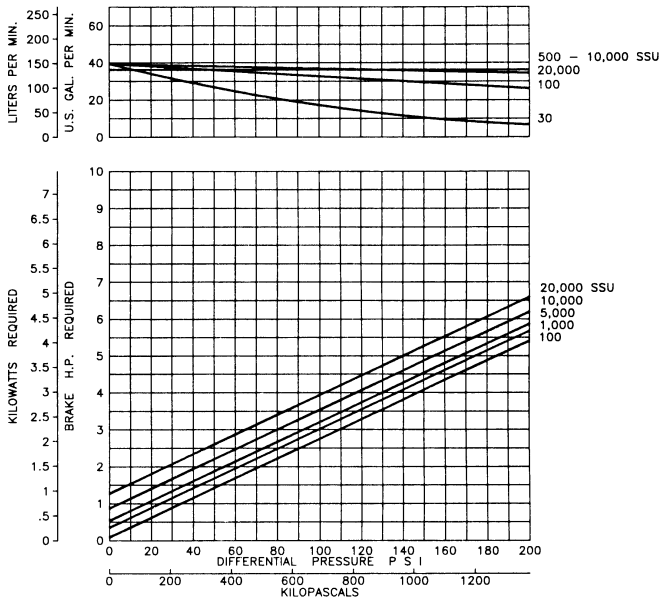

330 RPM

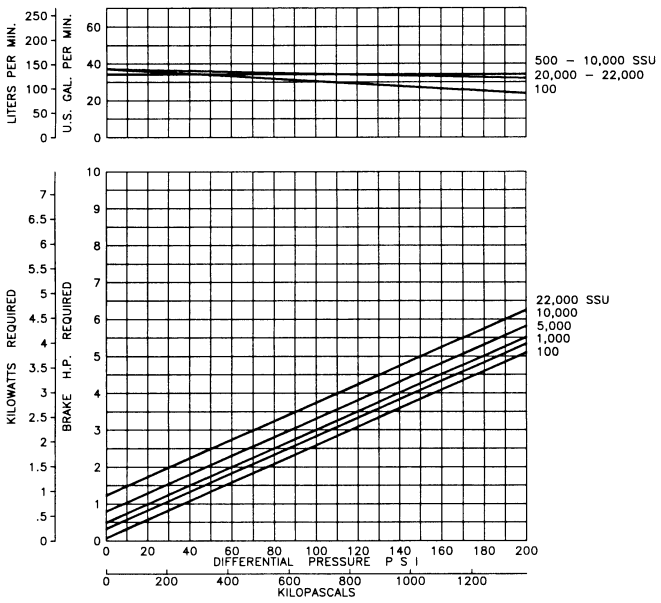

300 RPM

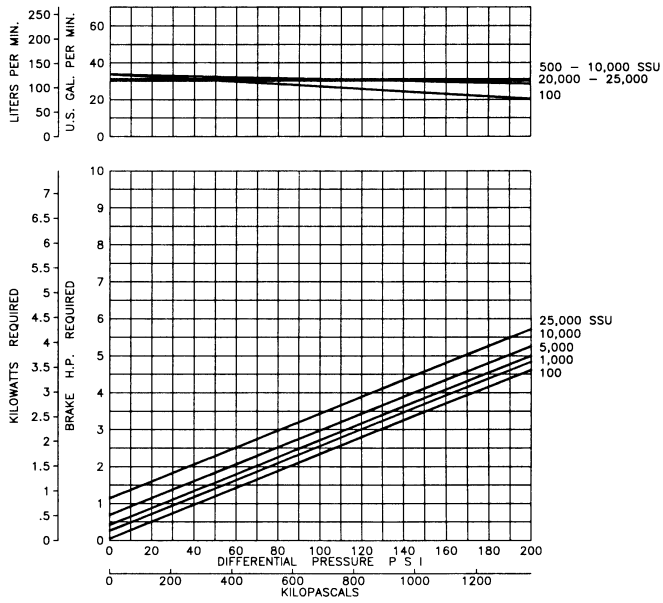


NOTE: Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

CHARACTERISTIC CURVES

Models: NP2

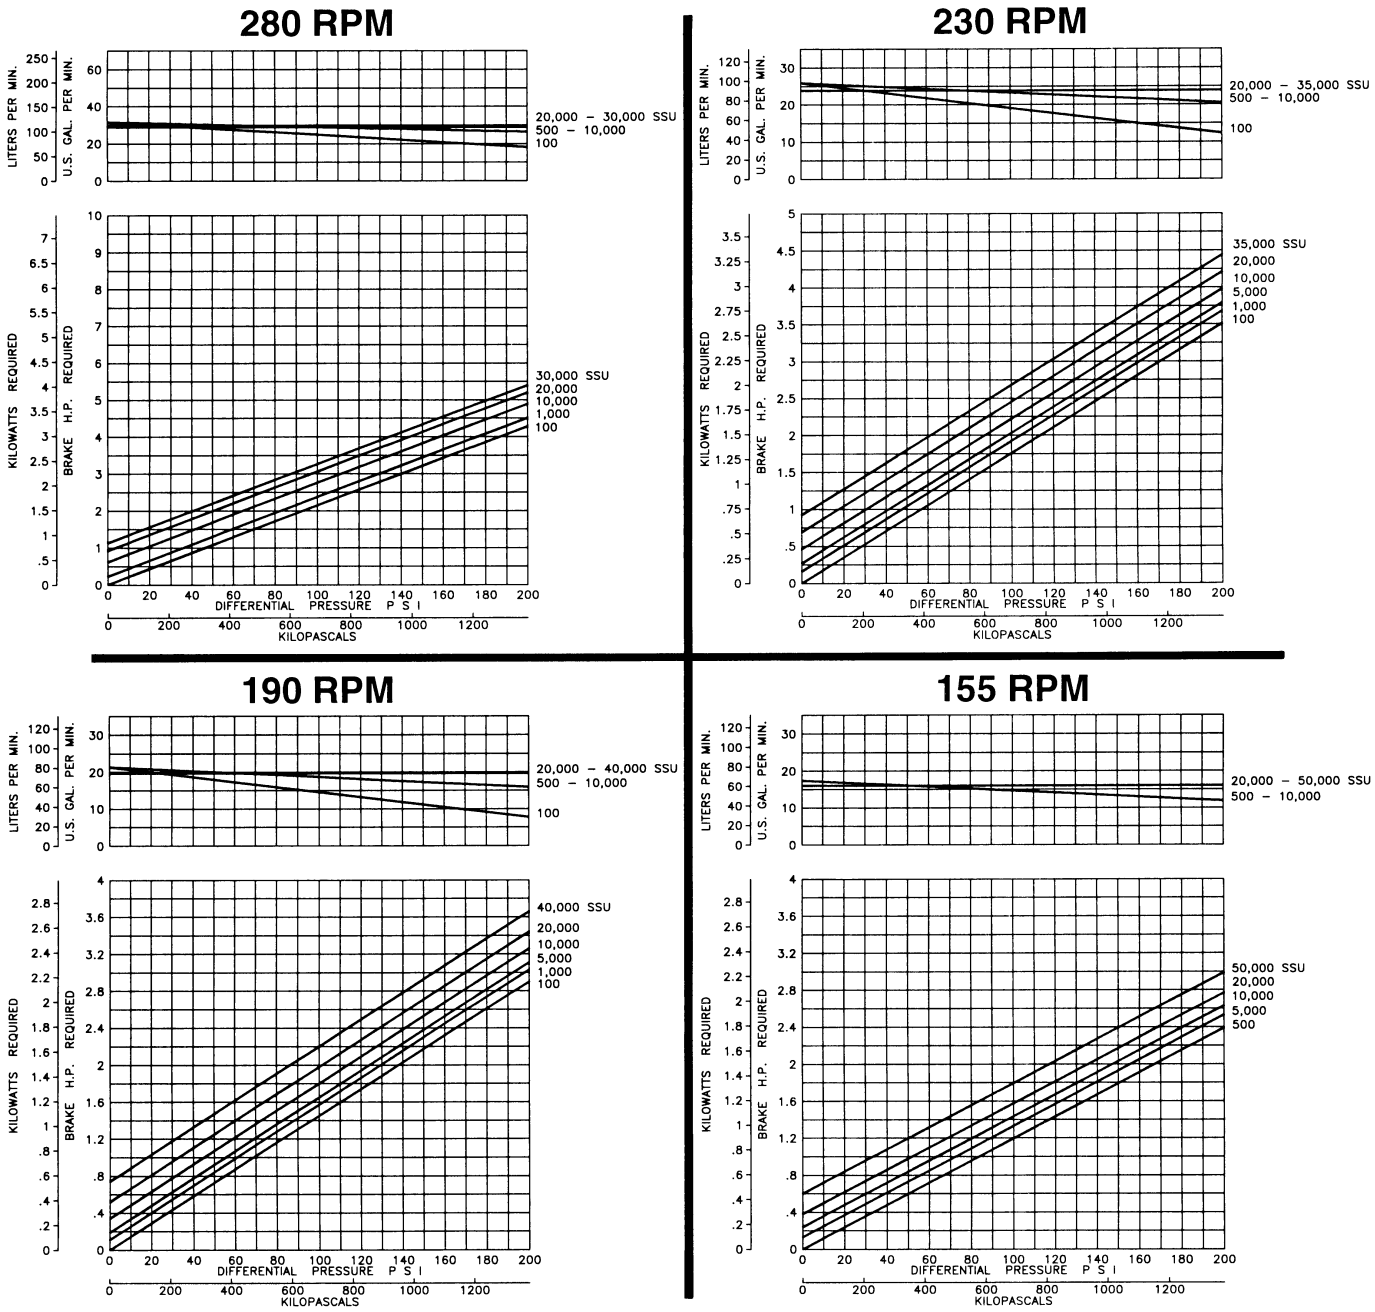


NOTE: Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

CHARACTERISTIC CURVES

Models: NP2

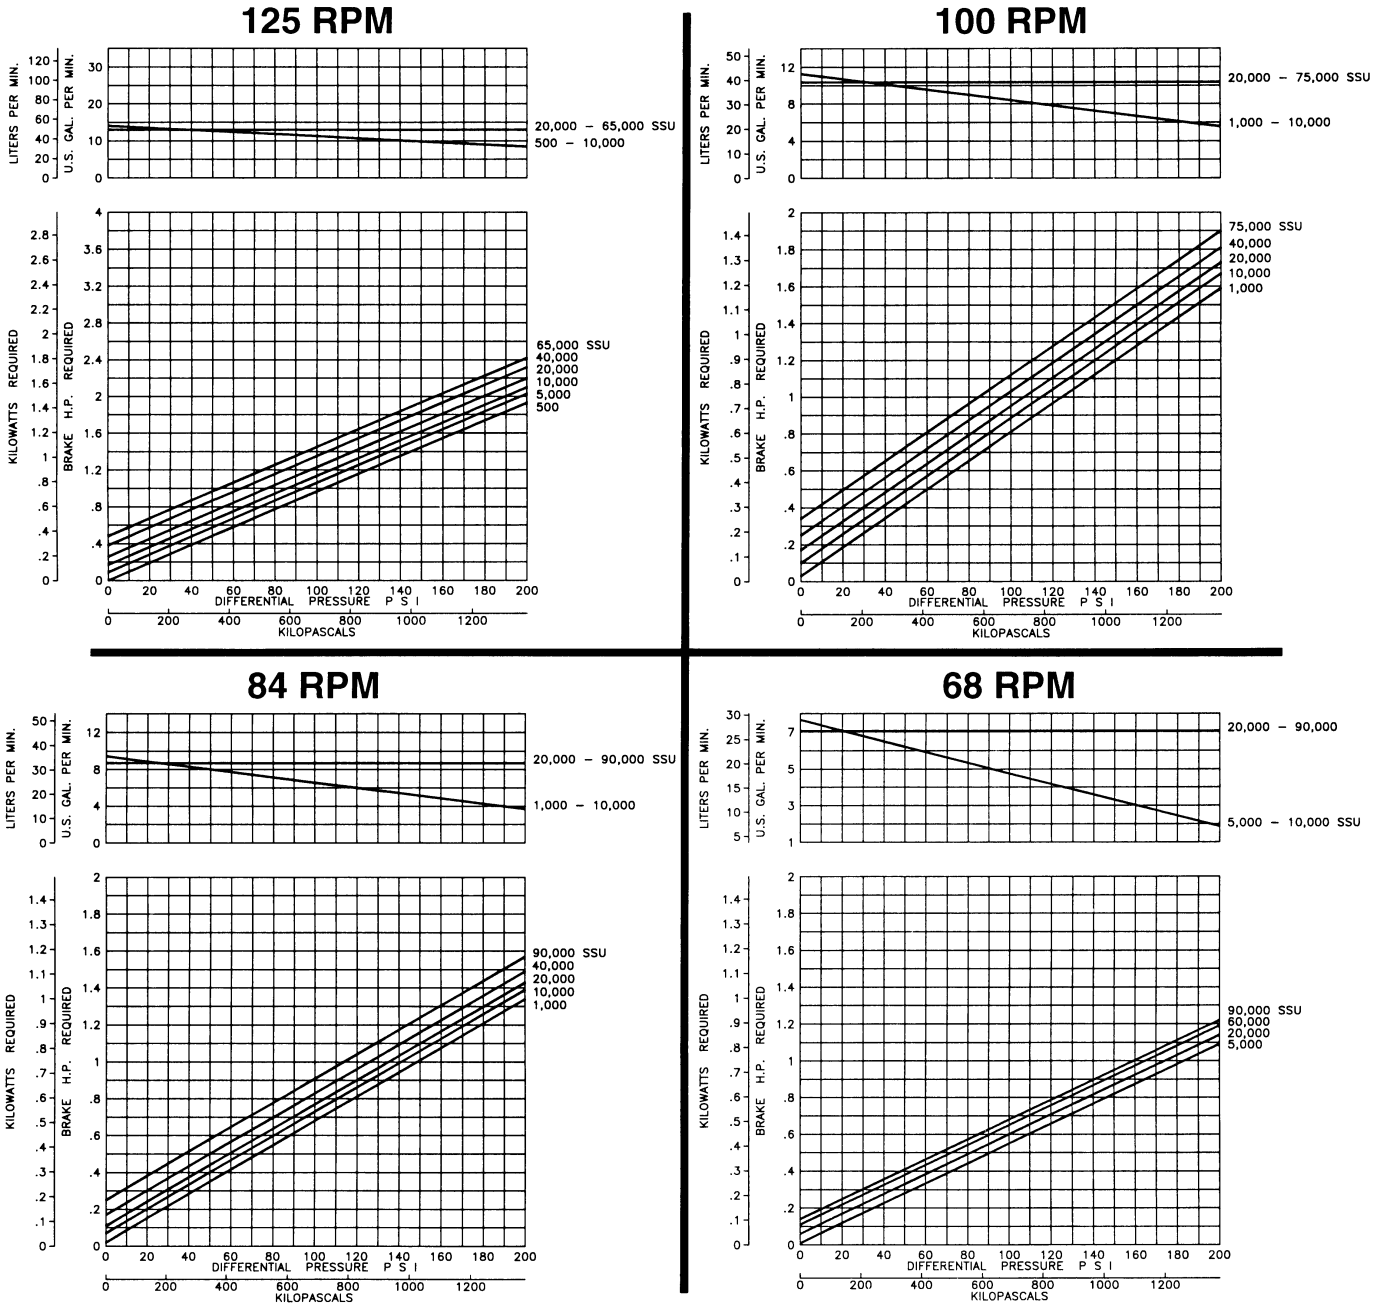

NOTE: Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

Distributed by:
"DAIS GLOBAL " LTD 3, Poruchik Nedelcho Bonchev Str., fl. 5 1528 Sofia, Bulgaria
tel: +359 2 973 27 67, e-mail: office@daisglobal.eu