

CHARACTERISTIC CURVES
Models: SMVP50B

Page Number	108-035
Effective	July 2002
Replaces	Oct 2001
Section	108

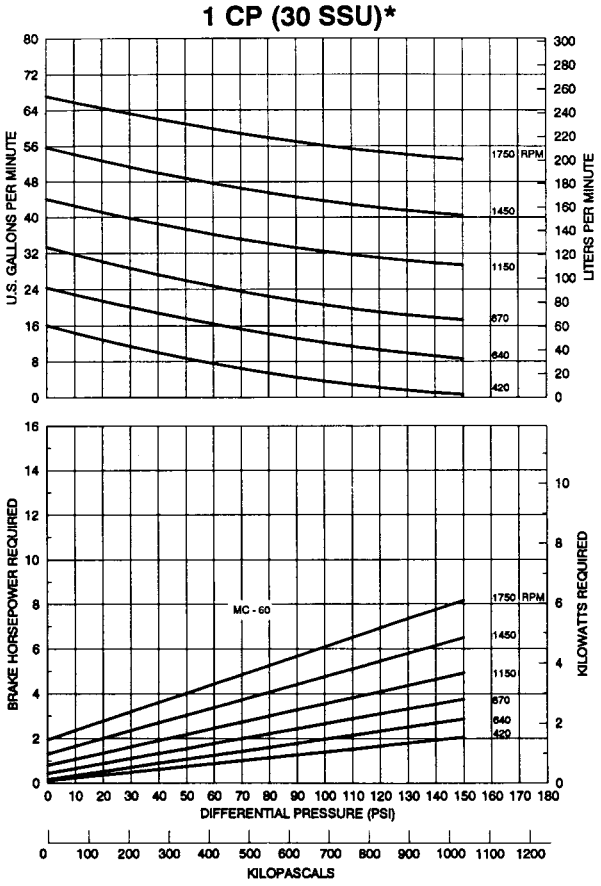

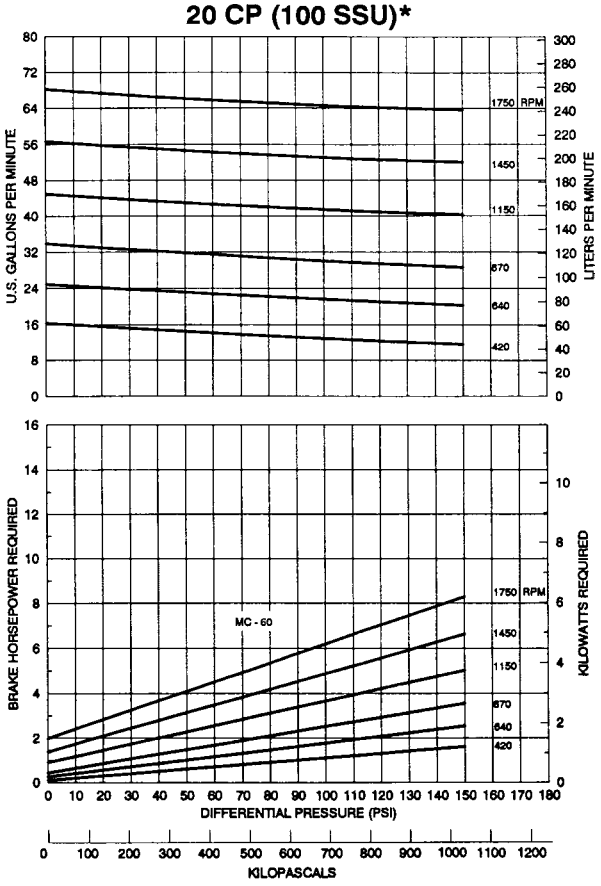


NOTE: The MC (dotted) lines are provided to assist in magnetic coupling selection. The MC lines can be used for operating temperatures up to 200ºF (93ºC). For higher temperatures, consult factory.


Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

*Centipoise (CP) to SSU conversion is based on a specific gravity of 1.0.

CHARACTERISTIC CURVES
Models: SMVP50B

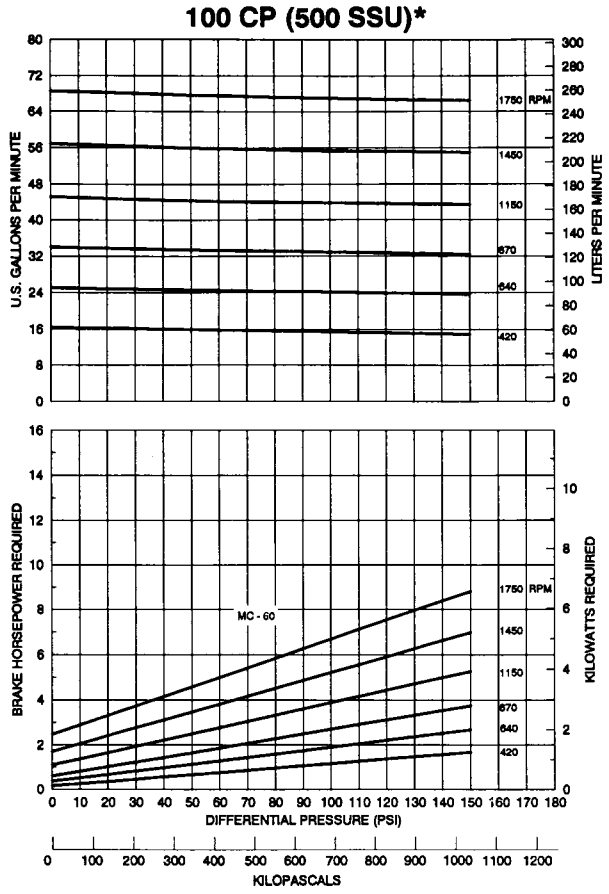

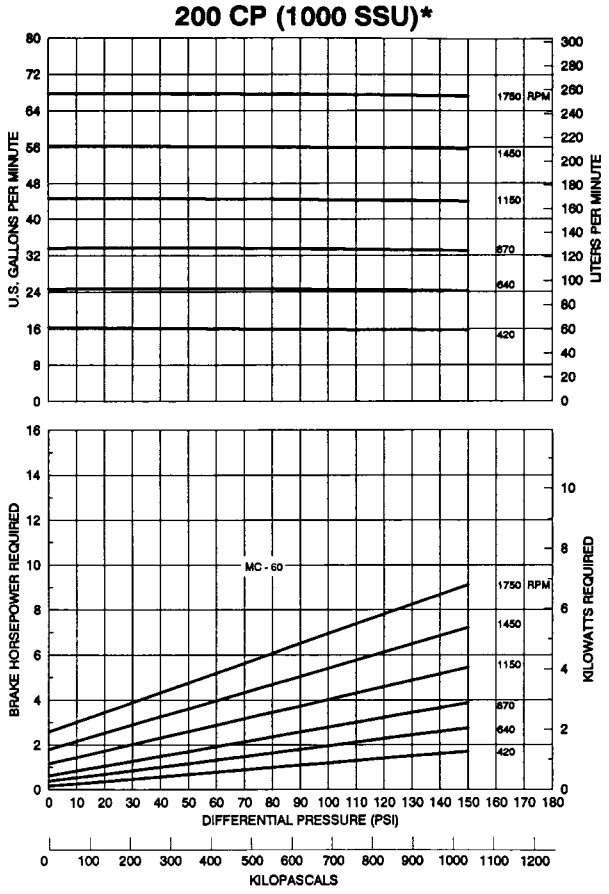


NOTE: The MC (dotted) lines are provided to assist in magnetic coupling selection. The MC lines can be used for operating temperatures up to 200ºF (93ºC). For higher temperatures, consult factory.


Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

*Centipoise (CP) to SSU conversion is based on a specific gravity of 1.0.

CHARACTERISTIC CURVES
Models: SMVP50B

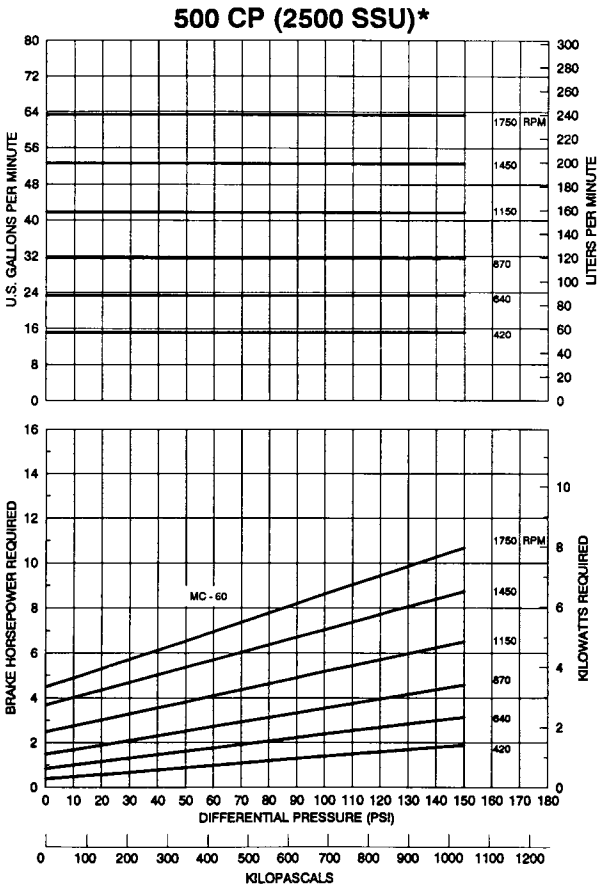

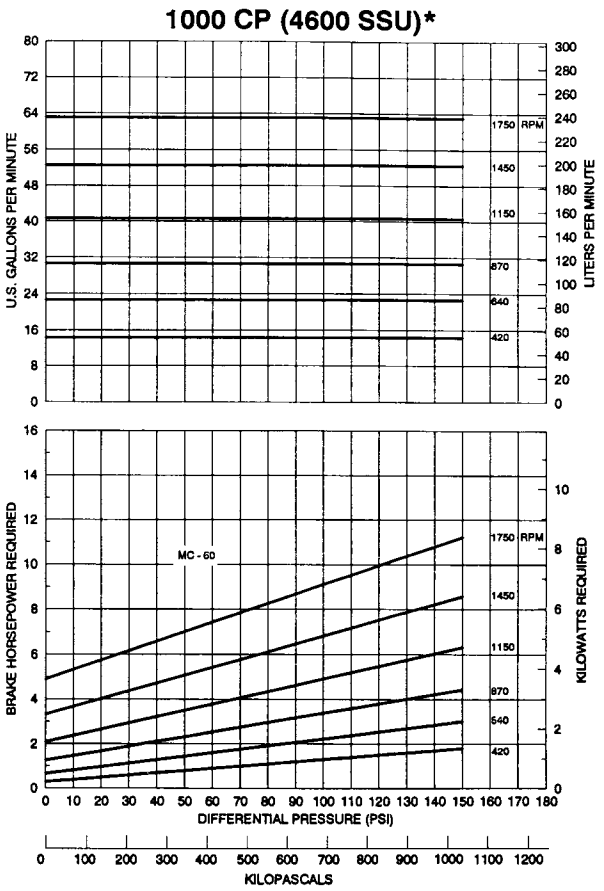


NOTE: The MC (dotted) lines are provided to assist in magnetic coupling selection. The MC lines can be used for operating temperatures up to 200ºF (93ºC). For higher temperatures, consult factory.

Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

*Centipoise (CP) to SSU conversion is based on a specific gravity of 1.0.

2000 CP (9400 SSU)*

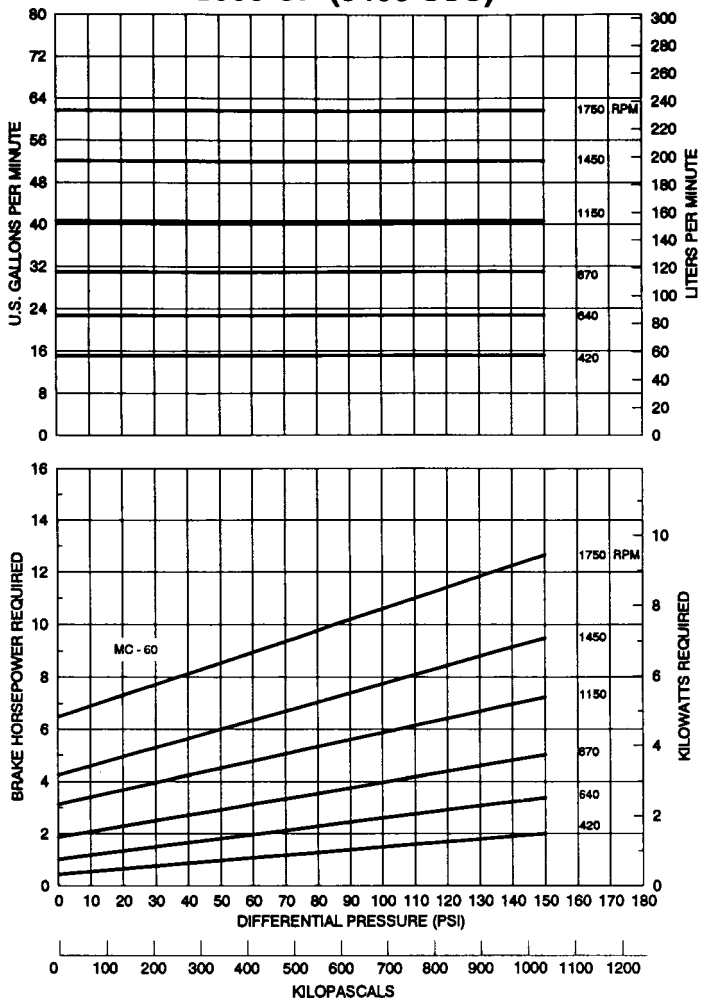

Distributed by:
"DAIS GLOBAL " LTD 3, Poruchik Nedelcho Bonchev Str., fl. 5 1528 Sofia, Bulgaria
tel: +359 2 973 27 67, e-mail: office@daisglobal.eu