


OPW Autogas BN300 Series LPG Nozzle

The BN300 with Thumb Release is designed for the Italian-Type coupling. This style is the easiest to use of the locking LPG nozzles. Nozzle inlet has 1" GAS threads. Also available in brass models.

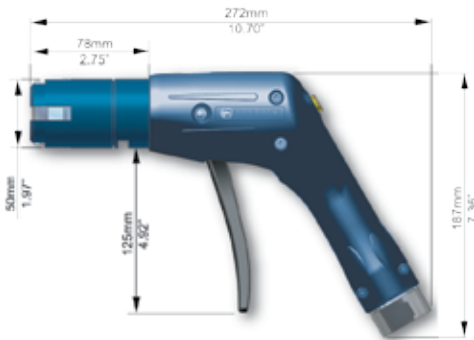

BN300

Materials

- Body: Aluminum
- Internal Components: Brass and steel
- Seals: Specially formulated polymers and elastomers specific to LPG applications.
- External Components: Aluminum and stainless steel

OT321



BN300



Features

- ◆ User-Friendly Single-Action Operation – entire fueling operation is initiated by simply engaging nozzle to the receptacle with small twist and a single squeeze of the hand.
- ◆ New Ergonomic Design – 2 resin shells insulate and protect the internal parts from falls and the operator from the effects of the low temperature generated by the high-flow LPG. Minimum effort is required to couple the nozzle and the ergonomic release button makes release easier.
- ◆ Ease of Use – Incorporates a single plane 360° inlet swivel.
- ◆ Individually Leak Tested and Inspected with Traceable Serial Numbers
- ◆ Low Vent Volume upon disconnected 1.6cc
- ◆ Replaceable Rubber Cover (optional) – deflects venting LP gas away from operator's hand.
- ◆ Nylon/Fiberglass Hand Insulator protects operator from low temperature effects created by high-flow LPG gas.

Specifications:

- Maximum Operating Pressure: 362 psi (25 bar)
- LPG Discharge on Disconnect: 1.6cc
- Weight: 3.41 lbs. (1.55 kg)
- Locking Release: Push Button on Body
- Coupling Style: Italian Style
- Temperature Range: 40° F to 212° F (-40° C to 100° C)

Ordering Specifications

Product No.	Inlet Thread Size	Max. Allowable Service Pressure	
BN300	1" GAS	362 psi	25 bar
OT321	3/4" GAS Adaptor		

Distributed by:



3, Poruchik Nedelcho Bonchev Str., fl. 5
 1528 Sofia, Bulgaria
 tel: +359 2 973 27 67
 e-mail: office@daisglobal.eu