

"Pop-Action" Pressure Relief Valves

General Information

The "Pop-Action" design permits the RegO® Pressure Relief Valve to open slightly to relieve moderately excessive pressure in the container. When pressure increases beyond a predetermined point, the valve is designed to "pop" open to its full discharge capacity, reducing excess pressure quickly. This is a distinct advantage over ordinary valves which open gradually over their entire range, allowing excessive pressure to develop before the relief valve is fully open. All RegO® internal, semiinternal, and external relief valves incorporate this "Pop-Action" design.

Relief Valves in this catalog are only intended for use in LP-Gas or anhydrous ammonia service. Do not use any other service commodity. If you have an application other than conventional LP-Gas or anhydrous ammonia service, contact REGO® before proceeding.


Fully Internal "Pop-Action" Pressure Relief Valves for Transports and Delivery Trucks A8434 and A8436 Series

Application

Designed specifically for use as a primary relief valve in ASME transports and delivery trucks with 2" and 3" NPT couplings.

Features

- Low profile design assures maximum protection against sheering or distortion.
- All functioning parts are located below the level of the container connection to reduce the possibility of damage or tampering.
- Longer spring size designed to minimize stress cracking in service.
- Use of two different materials for stem and guide minimizes the possibility of stem seizure which may occur when similar materials are used.
- Internal octagonal wrenching broach assures easy installation and removal.
- ASME approved for use with LP-Gas and anhydrous ammonia.

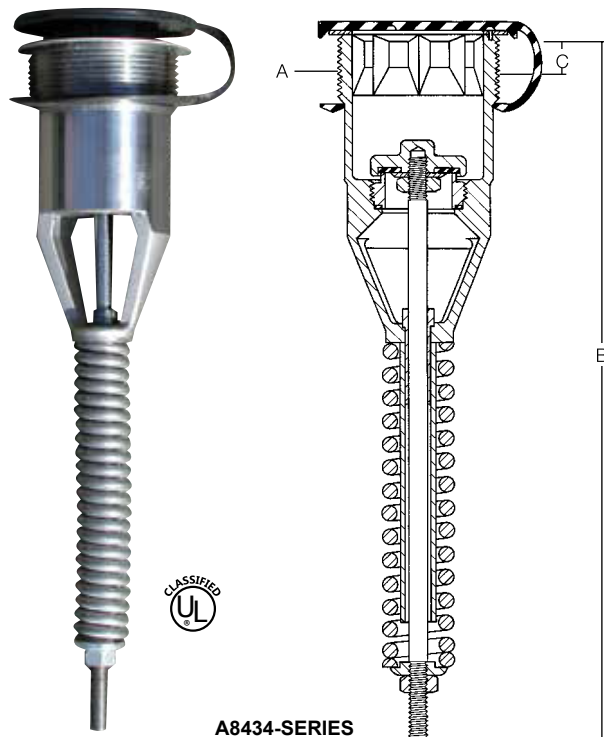

Materials

Body Stainless Steel
Spring Stainless Steel
Stem Stainless Steel
Stem Bushing 17 - 4PH Stainless Steel
Seat Disc Resilient Synthetic Rubber

Ordering Information

Part Number	Start To Discharge Setting PSIG	A Container Connection	B Overall Height (Approx.)	C Height Above Coupling (Approx.)	UL (At 120% of Set Pressure)	ASME (At 120% of Set Pressure)	Suitable for Tanks with Surface Area Up To:*	Protective Cap (Included)
A8434N	265	2" M. NPT	9 1/16"	1/2"	3700	3659	175 Sq. Ft.	A8434-11B
A8434G	250					3456		
A8436N	265	3" M. NPT	17 7/8"	3/4"	10210	9839	602 Sq. Ft.	A8436-11B
A8436G	250					9598		



Distributed by:



Bulgaria
Telephone: +359 2 973 27 67
Fax: +359 2 973 26 65
E-mail: office@daisglobal.eu
Web: http://markuchi.eu/

România
Telephone/Fax : +40 21 780 45 58
E-mail: office_ro@opwmarket.com
Web: http://furtunuri.eu/

Srbija
Telephone/Fax : 038111/2619-200
E-mail: office_sr@opwmarket.com
Web: http://creva.eu/